

ISODOOR



UNIVERSAL SOUND ISOLATION DOOR

| | |
|------------------------|--|
| Product Name | IsoDoor |
| Description | Universal sound isolation door with several one sided panel options for a balance of performance and aesthetics. The IsoDoor will meet or exceed isolation requirements in most common applications with consistent performance at all frequencies. Fits any existing frame and door handle set. Manufactured entirely in-house by IsoStore to your specs. |
| Dimensions | Standard 36" x 80". RO framed to 38" x 82". |
| Slab Thickness | 1-3/4" |
| Weight | 231 pounds |
| Jamb Material | 3/4" thick, custom depth |
| Hinges | 5" ball bearing hinges |
| Perimeter Seals | Rubber perimeter seals and acoustic threshold to be installed during installation. Fully mortised automatic door bottom installed during manufacturing. |
| Panels | Standard is smooth panel. Available in 7 other one sided panel styles. |

Independent Test Results (Test #NWTL120622-07)

| | | | | | | | | | | | | | | | | | | | | | | | | |
|----------------------|----|----|----------------------------|-----|-----|----------------------|-----|-----|-----|-----|-----|-----|-----|----|-------|------|----|------|-------|----|----|------|----|-----|
| H Z | 50 | 63 | 80 | 100 | 125 | 160 | 200 | 250 | 315 | 400 | 500 | 630 | 800 | 1k | 1.25k | 1.6k | 2k | 2.5k | 3.15k | 4k | 5k | 6.3k | 8k | 10k |
| T L | 27 | 29 | 28 | 30 | 30 | 33 | 33 | 35 | 37 | 38 | 40 | 42 | 43 | 44 | 44 | 44 | 44 | 45 | 47 | 50 | 54 | 57 | 60 | 60 |
| S T C | 43 | | O I T C | 38 | | D E F | 27 | | | | | | | | | | | | | | | | | |

IsoStore

ADDRESS

4013 E Barber Dr
Boise ID 83716

TELEPHONE AND FAX

877.866.6473
208.369.4650

WEB


IsoStore.com
info@IsoStore.com

The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested applications may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications.

ISODOOR



UNIVERSAL SOUND ISOLATION DOOR

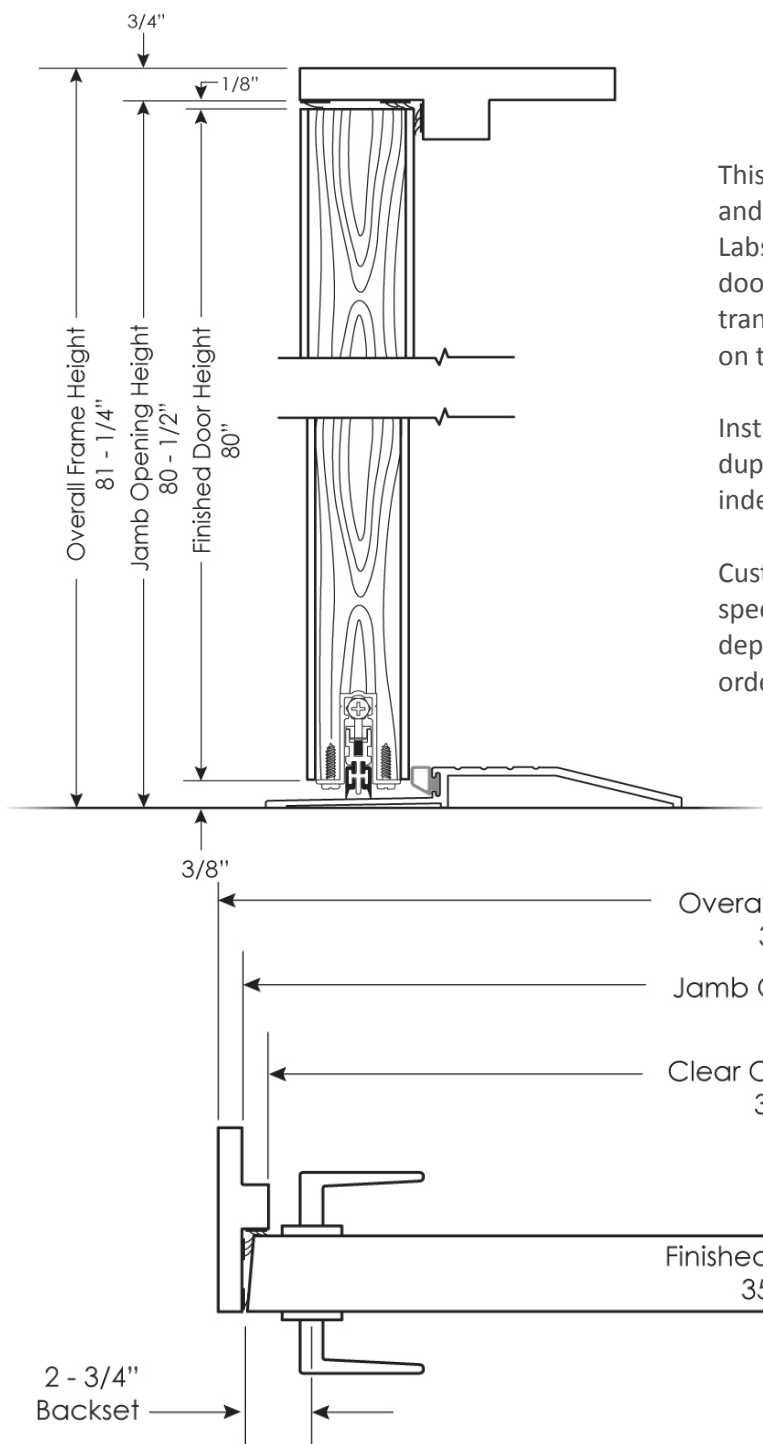

This door was tested as a single operating door and in communicating door assemblies at NWAALabs. The full test results of the single operating door can be found in test #NWTL120622-07. The transmission loss results of this test can be found on the previous page.

Installation instructions must be followed to duplicate performance results achieved in independent testing.

Custom door width, door height, and wood species are available upon request. Door jamb depth is specified by the customer when ordering.

IsoStore

ADDRESS

4013 E Barber Dr
Boise ID 83716

TELEPHONE AND FAX

877.866.6473
208.369.4650

WEB

IsoStore.com
info@IsoStore.com