



ISODOOR SD

BY ISOSTORE

[SOUND CONTROL DOORS]

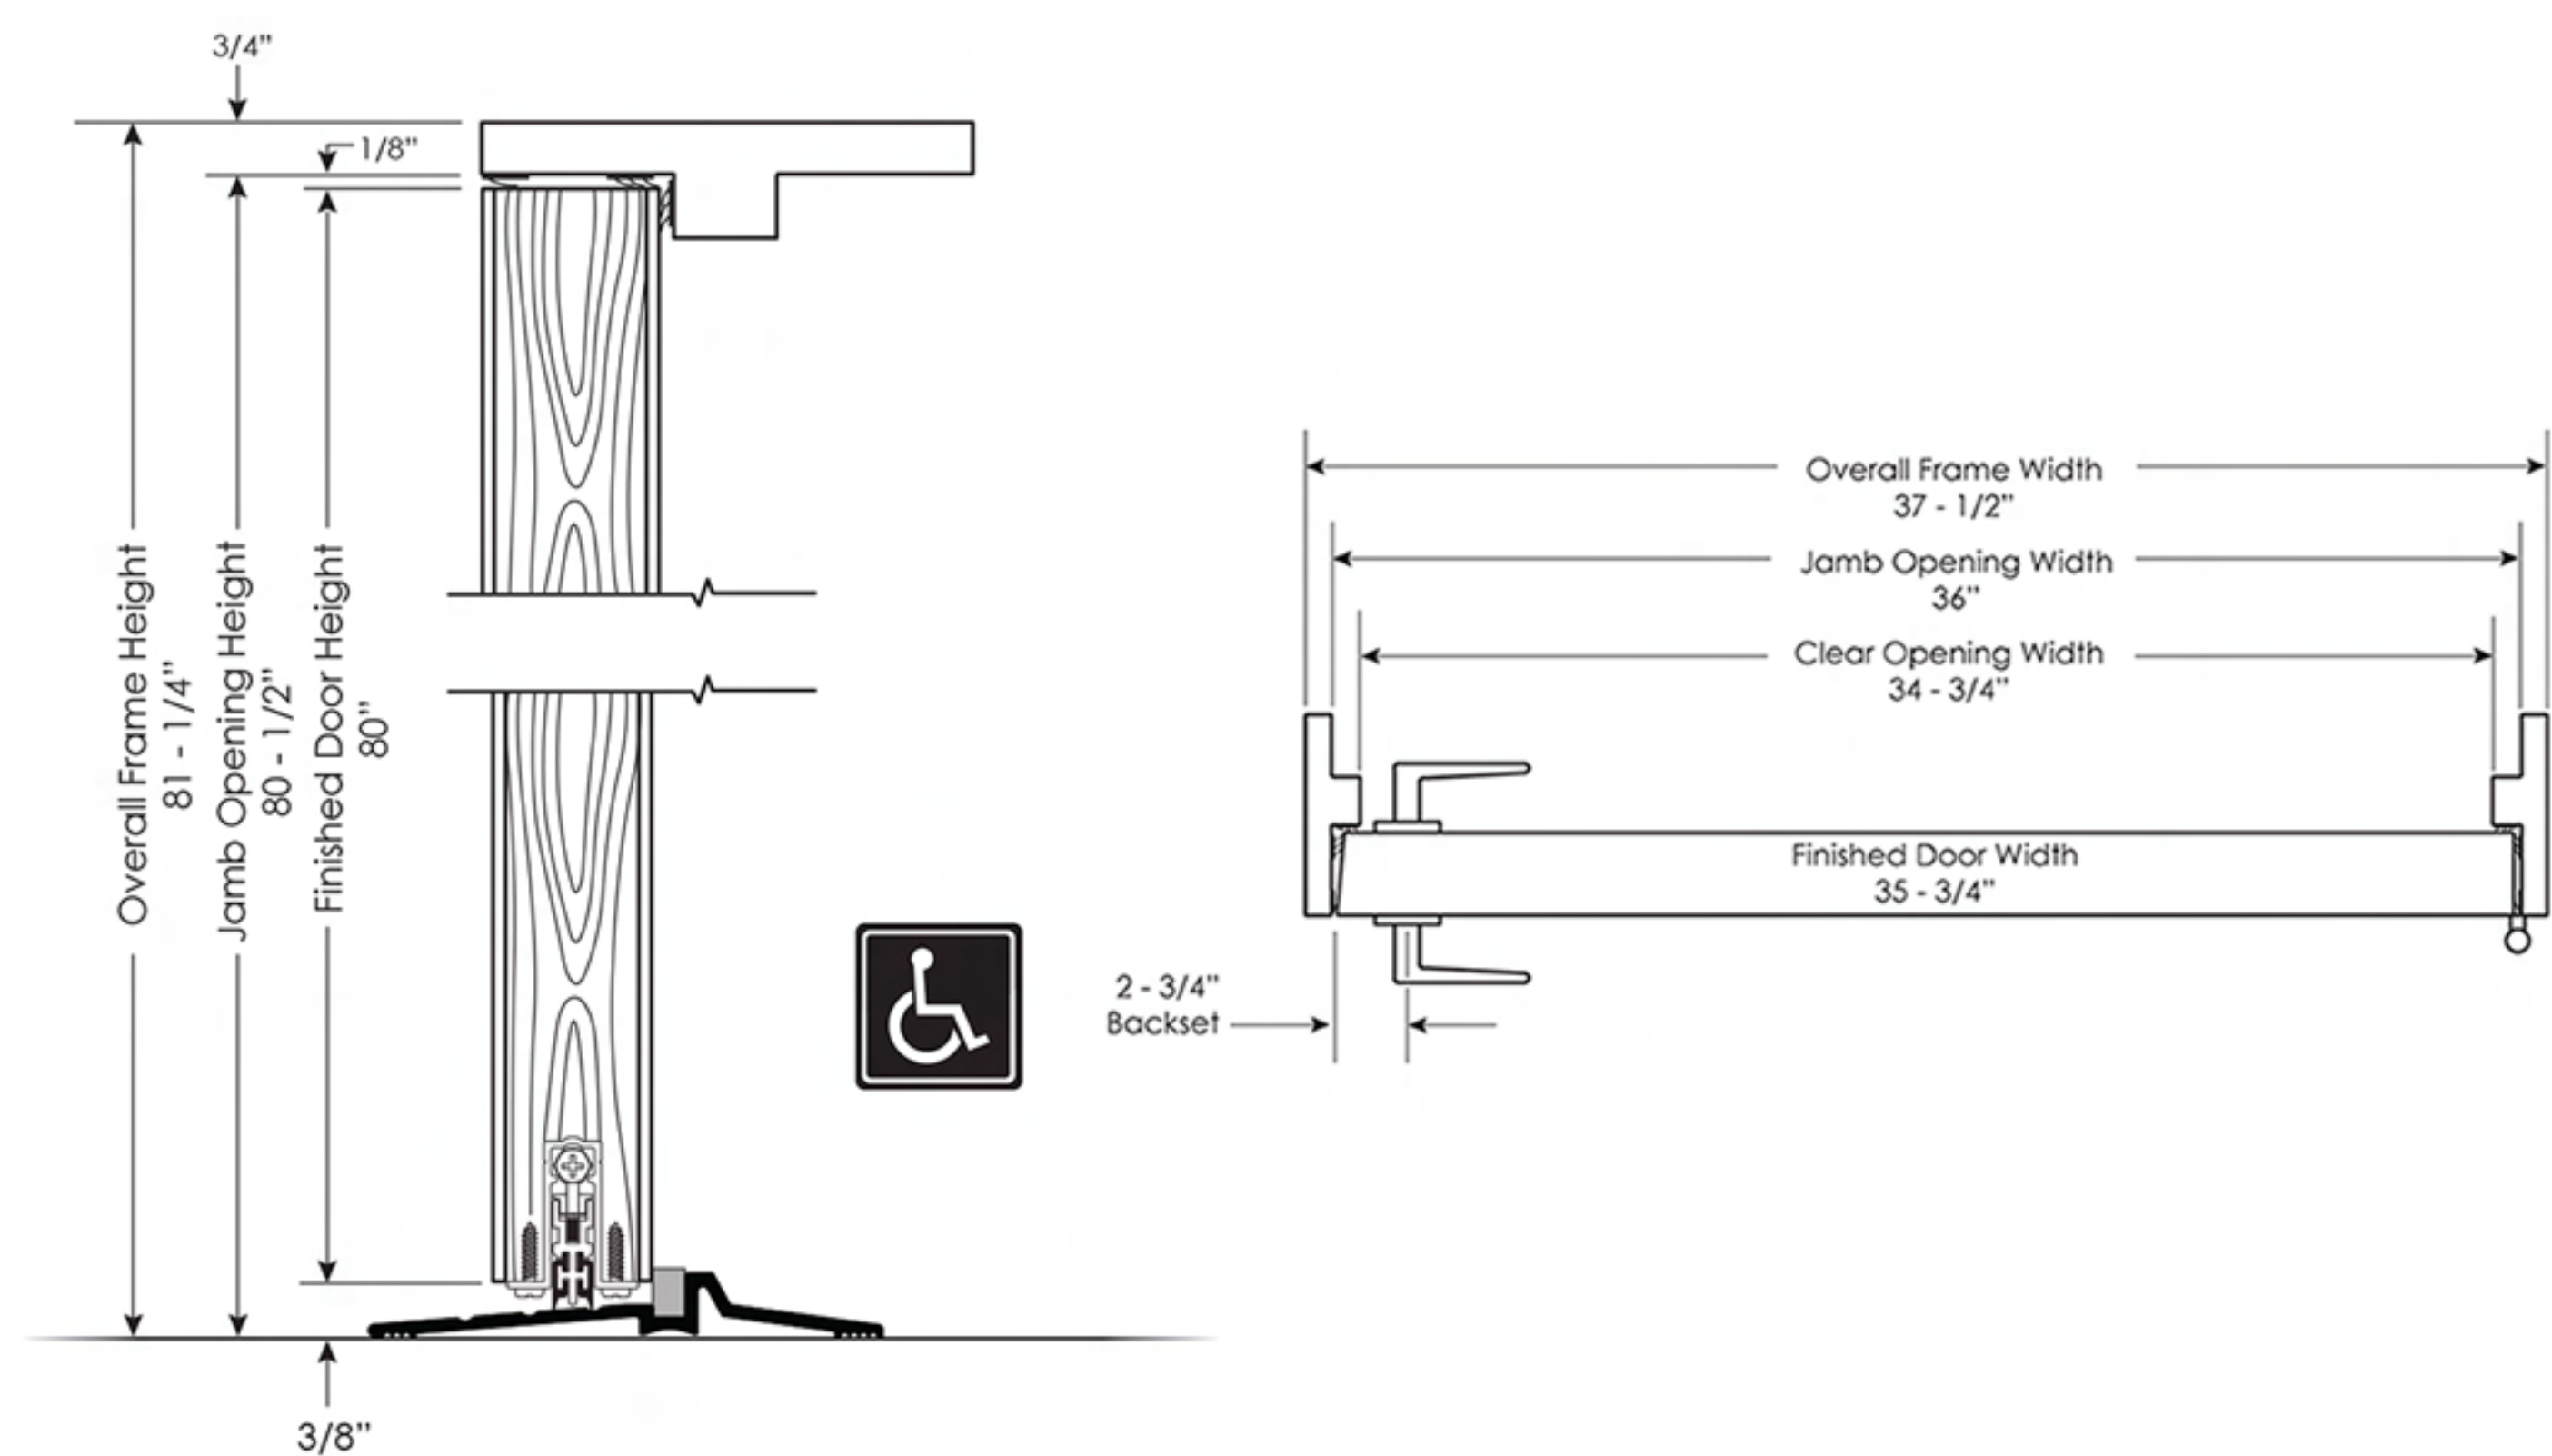

Swing Specification

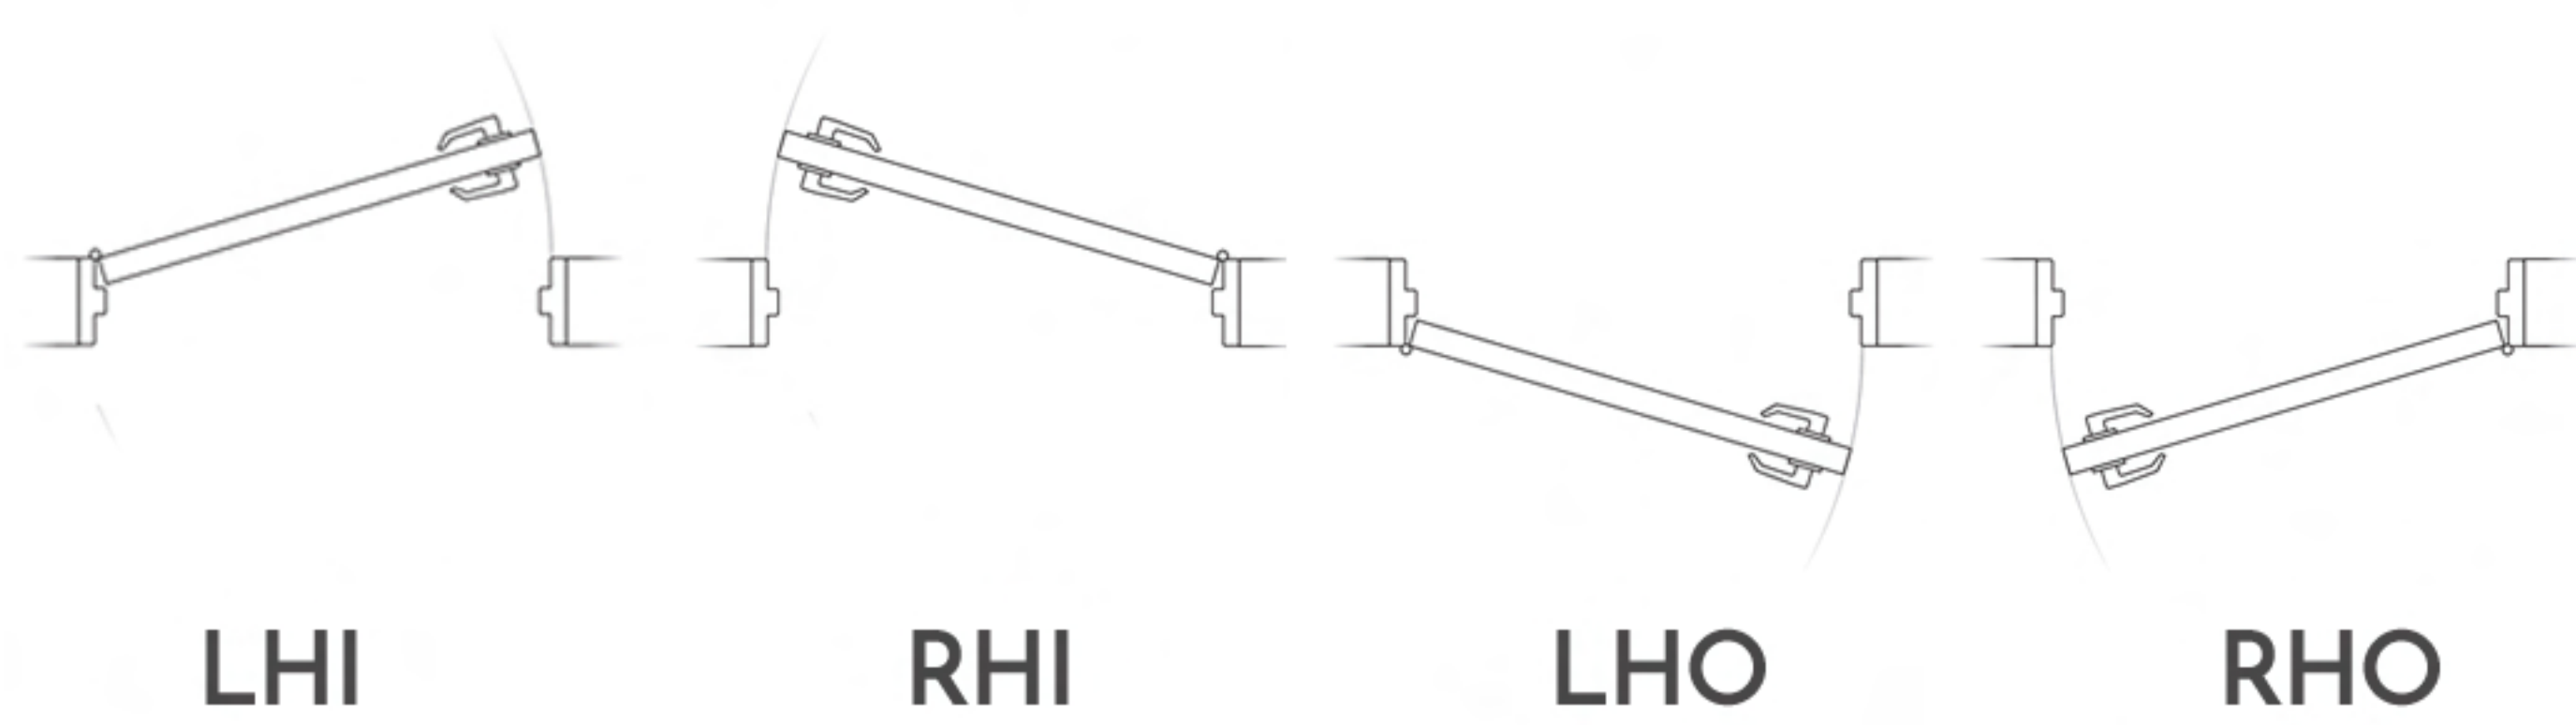

Product Key Points

- **WHERE TO USE**
The IsoDoor SD is generally used in offices, vocal booths, mixing rooms, and other similar areas that require a high level of isolation with noise generally 65 dB or below. We recommend our IsoDoor SD in walls rated up to STC 55.
- **UNIVERSAL DOOR THICKNESS**
The 1-3/4" thick door slab allows our customers to use standard off-the-shelf door handles. The weight of the IsoDoor SD, at 230 pounds for a standard size, is still a relatively easy weight for two installers to handle.
- **FOOLPROOF INSTALLATION WITH GUIDE**
No experience necessary to install our IsoDoors! We also include a full installation guide with step-by-step instructions on how to install our doors as single or double doors.
- **LOW PRICE, FANTASTIC QUALITY**
Our customers are appreciative of our low pricing due to our factory direct approach to sales, but absolutely thrilled when they receive our doors and see quality was not sacrificed for those low prices!

Technical Data for the IsoDoor SD

Door Size	Standard is 36" x 80". Custom sizes available from 24" wide to 42" wide and 48" to 96" tall.
Door Thickness	1-3/4"
Weight	230 pounds for standard 36" x 80"
STC Rating	43
Fire Rating	20 minute rating for door and jambs.
Material	Slab is standard with a birch veneer. Jambs are standard with solid beech.
Hardware	Includes continuous hinge and acoustic threshold in standard brushed nickel or black.
Seals	Fully mortised acoustic door bottom included along with full perimeter seals for sides and top.



ISOSTORE
EXPERT SOUND CONTROL

Toll-Free: 877-866-6473
Local: 208-514-1931

Email: info@isostore.com
Web: isostore.com