



ISODOOR V

BY ISOSTORE

[SOUND CONTROL DOORS]

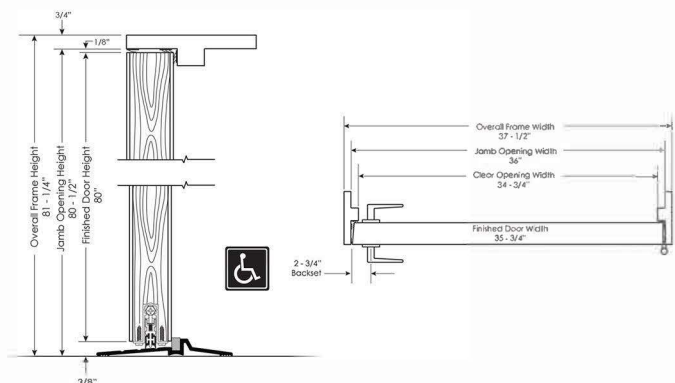

Swing Specification

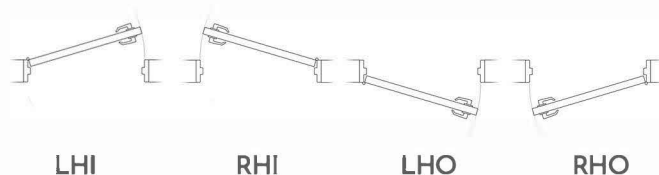

Product Key Points

- **WHERE TO USE**

The IsoDoor V is generally used in bedrooms, hotels, offices, vocal booths, mixing rooms, and other similar areas that require a better level of isolation than a solid wood or DIY built door in rooms with noise generally under 60 dB. We recommend our IsoDoor V in walls rated up to STC 47.

- **UNIVERSAL DOOR THICKNESS**

The 1-3/4" thick door slab allows our customers to use standard off-the-shelf door handles. The weight of the IsoDoor V, at 140 pounds for a standard size, is still an easy weight for two installers to handle.

- **FOOLPROOF INSTALLATION WITH GUIDE**

No experience necessary to install our IsoDoors! We also include a full installation guide with step-by-step instructions on how to install our doors as single or double doors.

- **LOW PRICE, FANTASTIC QUALITY**

Our customers are appreciative of our low pricing due to our factory direct approach to sales, but absolutely thrilled when they receive our doors and see quality was not sacrificed for those low prices!

Technical Data for the IsoDoor V

Door Size Standard is 36" x 80". Other sizes of 30" x 80", 32" x 80", 36" x 84", and 36" x 96" are available.

Door Thickness 1-3/4"

Weight 140 pounds for standard 36" x 80"

STC Rating 37

Material Slab is standard with a birch veneer. Jamb are standard with solid beech.

Hardware Includes continuous hinge and acoustic threshold in standard brushed nickel or black.

Seals Fully mortised acoustic door bottom included along with full perimeter seals for sides and top.



ISOSTORE
EXPERT SOUND CONTROL

Toll-Free: 877-866-6473

Local: 208-514-1931

Email: info@isostore.com

Web: isostore.com