

ISODOOR V



VALUE LINE SOUND ISOLATION DOOR

Product Name	IsoDoor V
Description	The IsoDoor V performs significantly better than hollow core, solid core, and solid wood doors, and exceptionally well in communicating assemblies when combined with one of our other models. Fits any existing frame and door handle set. Pre-hung and fitted for full perimeter seals.
Dimensions	Standard 36" x 80". RO framed to 38" x 82".
Slab Thickness	1-3/4"
Weight	140 pounds
Jamb Material	3/4" thick, custom depth
Hinges	Continuous piano-style hinge
Perimeter Seals	Rubber perimeter seals and acoustic threshold to be installed during installation. Fully mortised automatic door bottom installed during manufacturing.
Panels	Only available as flush panel

Independent Test Results (Test #J0183.01A)

H Z	80	100	125	160	200	250	315	400	500	630	800	1k	1.25k	1.6k	2k	2.5k	3.15k	4k	5k
TL	28	28	30	34	33	33	34	35	35	34	34	33	34	37	39	42	44	47	49
S T C	37		O I T C		34		D E F		32										

IsoStore

ADDRESS
4013 E Barber Dr
Boise ID 83716

TELEPHONE AND FAX
877.866.6473
208.369.4650


WEB
IsoStore.com
info@IsoStore.com

The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested applications may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications.

ISODOOR V




VALUE LINE SOUND ISOLATION DOOR

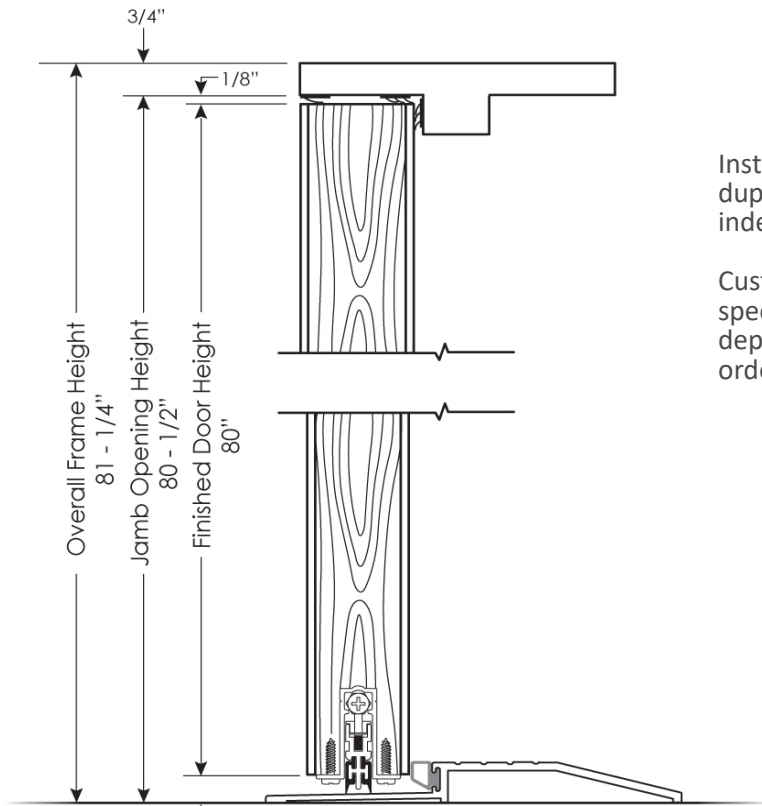

Installation instructions must be followed to duplicate performance results achieved in independent testing.

Custom door width, door height, and wood species are available upon request. Door jamb depth is specified by the customer when ordering.

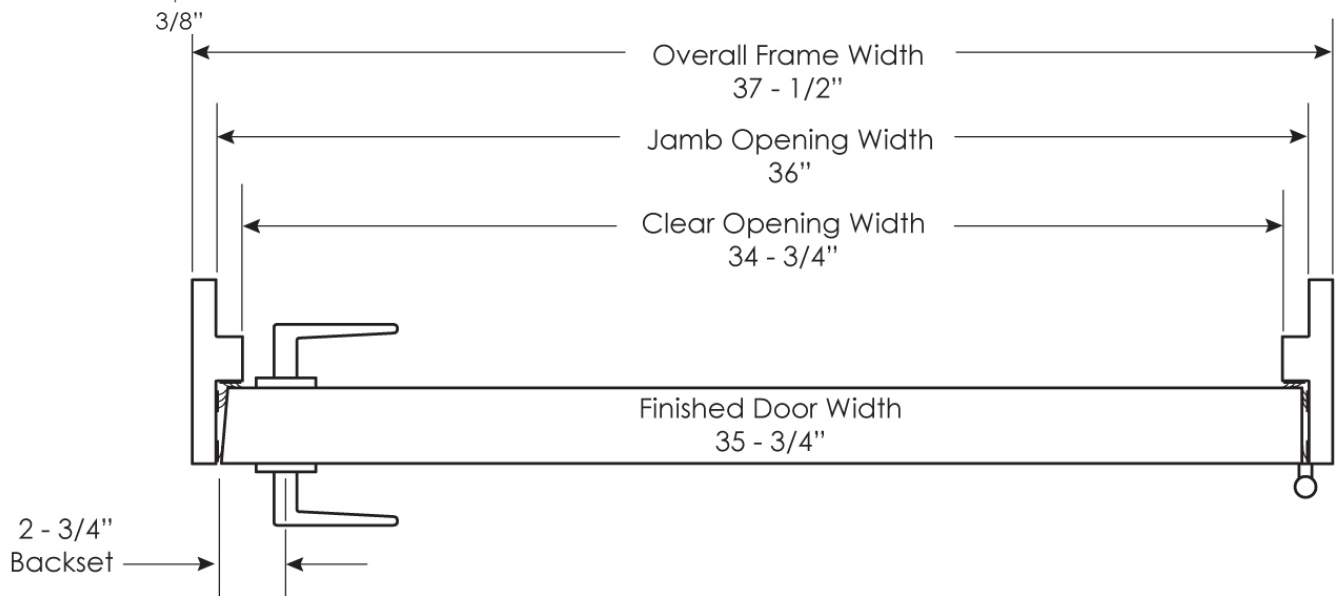

IsoStore

ADDRESS

4013 E Barber Dr
Boise ID 83716

TELEPHONE AND FAX

877.866.6473
208.369.4650

WEB

IsoStore.com
info@IsoStore.com