


PDS RUBBER



RUBBER PERIMETER DOOR SEAL

Product Name	PDS Rubber
Description	Perimeter door seal made of rubber with a peel and stick backing.
Application	Used to seal the space between the door slab and door stops or jamb.
Features and Benefits	<ul style="list-style-type: none">• Easy to install with peel and stick application.• Multiple rows of PDS Rubber can be installed to create dead air space between seals for maximum performance.• Multiple colors available to match most finishes.• Made entirely in the USA.
Dimensions	3/8" thick x 1/2" wide
Length	Available in 17', 20', and 25' rolls
Color	Available in black, gray, white, and dark brown
STC Rating	Independently tested to perform equal to bulky adjustable door stops, assume 1 STC point loss with double seal, 2 STC point loss with single seal
Other Ratings	UL 10C for fire, UL 1784 for smoke, ASTM E-283-91 for air infiltration, ASTM E90 for sound control

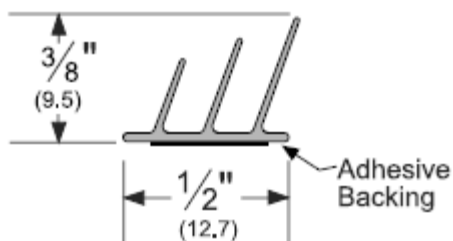

IsoStore

ADDRESS

4013 E Barber Dr
Boise ID 83716

TELEPHONE AND FAX

877.866.6473
208.369.4650

WEB

IsoStore.com
info@IsoStore.com

The information provided is accurate to the best of our knowledge at the time of issue. However, we reserve the right to make changes when necessary without further notification. Suggested applications may need to be modified to conform with local building codes and conditions. We cannot accept responsibility for products that are not used, or installed, to our specifications.